

MODEL 5381 PRESSURE REDUCING REGULATOR



MODEL 5381

The Model 5381 is a stainless steel pressure reducing regulator designed to handle small to mid-capacity flow rates in sanitary biotechnical process piping systems. This unit is capable of controlling outlet pressure to a level between 5 and 200 psig (.34 and 13.8 Barg).

FEATURES

- | | |
|---------------------------------------|---|
| High Stability: | High mass plug allows dampening of high frequency disturbances from inlet or outlet side of regulator. |
| Trim Removal: | Easily removable trim from regulator while in-line. |
| Adjustment Ease: | Adjusting knob for frequent set point changes. |
| Wetted Materials Construction: | All metallic parts are SST. Unit is cleaned to Cashco Spec. #S-1576. |
| Surface Finish: | Interior of body surface electro-polished to 32 micro-inch R_a finish with electro-polished exterior. |

NOTE: This valve is not self-draining, and should not be applied for applications requiring clean-in-place (CIP) or steam-in-place (SIP) capability.

APPLICATIONS

Used in pharmaceutical industry in production of many health care products for both human and animal consumption. Widely applied for processed food production — candy, beverages, nutritional supplements and artificial sweeteners. May also be used in cosmetics production and specialty chemicals.

Would be found supporting fermenters, batching tanks, cookers, dryers and other similar equipment.

STANDARD/GENERAL SPECIFICATIONS

Body Size and Material: 1/2" (DN15)
Wrought Barstock; ASTM A479,
Type 316L SST.

Body Connection: Standard - Sanitary "Tri-Clamp®".
Designed to seal against weld-type
clamp liners per ISO 2852.

Spring Chamber Materials: Standard - Cast SST; ASTM A351,
Grade CF3M.

Trim:

PART	S1L	SET
Diaphragm	302 SST	EPDM
Diaphragm Cover	—	TFE
Piston	316L SST	316L SST
Seat ¹	316L SST	TFE
Spring	302 SST	302 SST
Pusher Plate	316L SST	316L SST
Body Cap	316L SST	316L SST
Temperature Range °F (°C)	-20 to +400 (-29 to +205)	-20 to +300 (-29 to +149)
¹ The fixed portion of the seat is integral to the body. Indicated seat is the moving portion and is attached or integral with the piston.		

NOTE: Cashco, Inc. does not recommend metal seated trim on any service where the flow will be dead ended down stream of the pressure reducing regulator. Use composition seat for dead end service.

Gasket/Seal: TFE diaphragm gasket; TFE O-ring
at pusher plate location.

Operating Temperature: -20 to +400°F (-29° to +205°C)

Inlet Pressure: 600 psig (41.3 Barg) maximum

Range Springs & Maximum Pressure Drop: Standard: SST

Range Spring		Recommended Max. Pressure Drop	
psig	(Barg)	psig	(Barg)
5-30	(.34-2.1)	400	(27.6)
20-80	(1.4-5.5)	400	(27.6)
70-140	(4.8-9.6)	400	(27.6)
130-200	(9.0-13.8)	400	(27.6)

Cv's/Capacities: See Tables 1, 2, 3, and 4.

Cleaning: All units cleaned per Cashco Spec.
#S-1576.

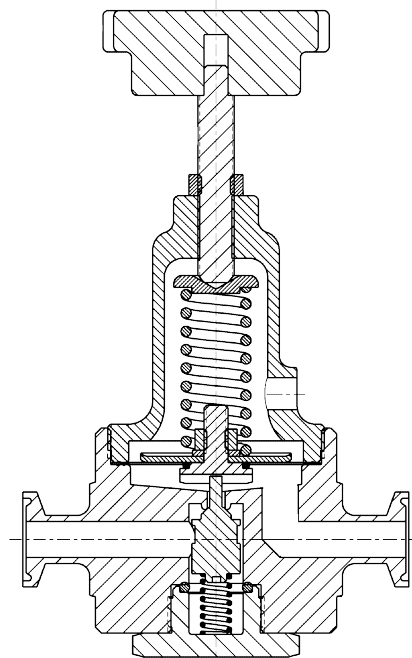


Figure 1: Metal Seat Design

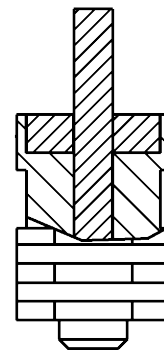


Figure 2: Composition Seat Design

TECHNICAL SPECIFICATIONS

TABLE 1
CAPACITY - Cv
(FL = 0.95)

OUTLET (P2) PRESSURE (psig)	METAL DIAPHRAGM			COMPOSITION DIAPHRAGM		
	% DROOP			% DROOP		
	10%	20%	30%	10%	20%	30%
10	.05	.09	.15	.13	.22	.35
25	.13	.24	.33	.35	.47	.50
50	.07	.15	.22	.35	.47	.50
75	.12	.23	.32	.45	.50	.50
100	.11	.21	.30	.39	.49	.50
125	.13	.24	.33	.42	.50	.50
150	.10	.19	.28	.38	.48	.50
200	.11	.21	.30	.35	.47	.50

TABLE 2
WATER CAPACITY - GPM
S.G. = 1.0 T - 60°F FL = 0.95
Composition Diaphragm Only

OUTLET FLOWING PRESSURE (psig)	INLET PRESSURE (psig)	10% Droop	20% Droop	30% Droop	OUTLET FLOWING PRESSURE (psig)	INLET PRESSURE (psig)	10% Droop	20% Droop	30% Droop
5	50	0.9	1.5	2.3	35	50	1.5	1.9	1.9
	75	1.1	1.8	2.9		75	2.5	3.1	3.2
	100	1.3	2.1	3.4		100	3.1	4.0	4.0
	125	1.4	2.4	3.8		125	3.7	4.6	4.7
	150	1.6	2.6	4.2		150	4.2	5.3	5.4
	175	1.7	2.9	4.6		175	4.6	5.8	5.9
	200	1.8	3.1	4.9		200	5.0	6.3	6.4
10	50	2.2	3.0	3.2	50	75	1.9	2.4	2.5
	75	2.8	3.8	4.0		100	2.7	3.4	3.5
	100	3.3	4.5	4.7		125	3.3	4.2	4.3
	125	3.8	5.0	5.4		150	3.8	4.8	5.0
	150	4.1	5.6	5.9		175	4.2	5.4	5.6
	175	4.5	6.0	6.4		200	4.7	5.9	6.1
	200	4.8	6.5	6.9					
15	50	2.1	2.8	3.0	75	100	1.8	2.4	2.5
	75	2.7	3.6	3.9		125	2.5	3.3	3.5
	100	3.2	4.3	4.6		150	3.0	4.1	4.3
	125	3.7	4.9	5.2		175	3.5	4.7	5.0
	150	4.1	5.5	5.8	100	200	3.9	5.3	5.6
	175	4.4	5.9	6.3		125	2.0	2.5	2.5
	200	4.8	6.4	6.8		150	2.8	3.5	3.5
25	50	2.3	2.5	2.5	125	175	3.5	4.2	4.3
	75	3.2	3.5	3.5		200	4.0	4.9	5.0
	100	3.9	4.3	4.3		150	2.1	2.5	2.5
	125	4.5	5.0	5.0		175	3.0	3.5	3.5
	150	5.0	5.6	5.6		200	3.6	4.3	4.3
	175	5.5	6.1	6.1					
	200	6.0	6.6	6.6					

TABLE 3
AIR CAPACITY - SCFH
S.G. = 1.0 T - 60°F FL - 0.95
1/2" Size - Composition Diaphragm Only


OUTLET FLOWING PRESSURE (psig)	INLET PRESSURE (psig)	10% Droop	20% Droop	30% Droop	OUTLET FLOWING PRESSURE (psig)	INLET PRESSURE (psig)	10% Droop	20% Droop	30% Droop
5	25	200	300	500	35	50	700	900	900
	50	300	500	800		75	1200	1500	1500
	75	400	700	1100		100	1600	2000	2000
	100	500	900	1400		150	2300	2900	2900
	150	800	1300	2000		200	3000	3700	3800
	200	1000	1700	2700		300	4400	5500	5600
	300	1500	2500	3900		400	5800	7200	7400
	400	1900	3200	5200	50	75	1000	1300	1300
10	25	500	600	700		100	1500	1800	1900
	50	800	1100	1100		150	2200	2800	2900
	75	1100	1500	1600		200	2900	3600	3800
	100	1400	1900	2000		300	4200	5400	5600
	150	2000	2700	2900		400	5600	7100	7400
	200	2700	3600	3800	75	100	1100	1400	1500
	300	3900	5300	5600		150	1900	2600	2700
	400	5200	6900	7400		200	2600	3500	3700
15	25	400	600	600		300	3600	5200	5600
	50	800	1100	1100	100	400	5200	6900	7400
	75	1100	1500	1600		150	2000	2400	2400
	100	1400	1900	2000		200	2900	3500	3600
	150	2000	2700	2900		300	4400	5400	5500
	200	2700	3600	3800	150	400	5900	7200	7400
	300	3900	5300	5600		500	7300	9000	9200
	400	5200	6900	7400		200	2400	2900	2900
25	50	1100	1100	1100		300	4400	5300	5300
	75	1400	1600	1600	200	400	6100	7200	7200
	100	1800	2000	2000		500	7700	9100	9100
	150	2600	2900	2900		300	3300	4400	4700
	200	3400	3800	3800		400	4900	6600	6900
	300	5000	5600	5600		500	6300	8500	9000
	400	6600	7400	7400					

TABLE 4
STEAM - LBS/HR
S.G. = Actual T = Saturated F_L = 0.95
1/2" Size - Metal Diaphragm Only

OUTLET FLOWING PRESSURE (psig)	INLET PRESSURE (psig)	10% Droop	20% Droop	30% Droop	OUTLET FLOWING PRESSURE (psig)	INLET PRESSURE (psig)	10% Droop	20% Droop	30% Droop
5	25	2	3	5	35	50	6	10	15
	50	3	6	9		75	10	17	26
	75	5	8	13		100	14	23	35
	100	6	10	16		125	17	29	43
	125	7	12	20		150	20	34	51
	150	9	15	23		175	23	39	58
	175	10	17	27		200	26	45	67
	200	11	19	30		240	31	53	80
	240	13	22	36	50	75	10	21	30
10	25	4	5	8		100	15	31	44
	50	7	8	14		125	19	40	56
	75	9	12	20		150	22	47	67
	100	12	15	25		175	26	55	77
	125	15	19	31		200	29	62	88
	150	17	22	36		240	35	74	104
	175	20	25	42	75	100	17	32	45
	200	23	28	47		125	24	46	65
15	240	27	33	56		150	30	58	82
	25	4	10	14		175	36	69	97
	50	8	19	28		200	41	79	111
	75	12	27	39		240	50	95	133
	100	15	35	50	100	125	16	36	50
	125	19	43	62		150	23	51	72
	150	22	51	73		175	29	64	90
	175	25	58	83		200	34	76	107
	200	28	66	94		240	42	93	130
	240	33	78	111	150	175	19	37	53
25	50	13	25	30		200	27	52	76
	75	20	38	46		240	38	72	104
	100	26	49	59	200	240	33	60	83
	125	31	60	72					
	150	37	71	85					
	175	43	83	100					
	200	49	94	113					
	240	58	111	134					

TABLE 5
OUTLET PRESSURE LIMIT–
SAFETY RELIEF VALVE SIZING & SETPOINT

RANGE SPRING (psig)	DIAPHRAGM MATERIAL	EMERGENCY ¹ OVER-PRESSURE (psig)	MAXIMUM Cv WITH VALVE PLUG WIDE OPEN
5-30, 20-80, 70-140, 130-200	ALL	1.5 x UVRS ²	0.5
¹ “Emergency Over-Pressure” is defined as the level of pressure, which if exceeded, may cause internal mechanical damage. ² UVRS - “Upper Value of Range Spring”; i.e. 130-200 psig (9 -13.8 Barg) range spring, value would be 200 psig (13.8 Barg).			

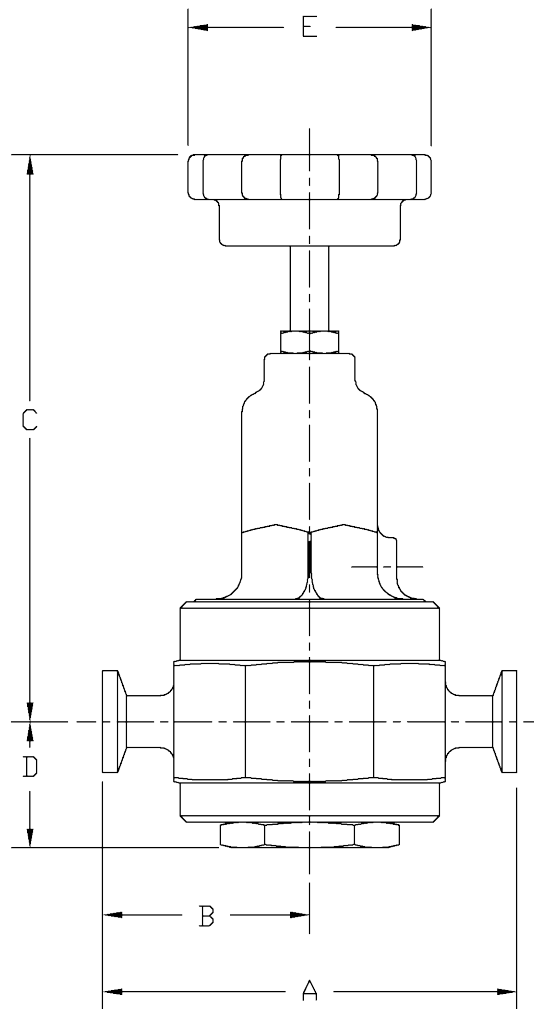

Weight = 4 Lbs.
(1.82 kgs)

DIMENSIONS AND WEIGHTS

Units in. (mm)				
A	B	C	D	E
4.00 (102)	2.00 (51)	5.47 (139)	1.22 (31)	2.35 (60)

NOTES

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. We reserve the right to modify or improve the designs or specifications of such product at any time without notice.

Cashco, Inc. does not assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use and maintenance of any Cashco, Inc. product remains solely with the purchaser.

MODEL 5381 PRODUCT CODE 02/07/20

FOR THE FOOD AND PHARMACEUTICAL INDUSTRY

An "X" in POS 12 followed by a 5-digit control number overrides remaining selections.

MS **4** – **A** POS 6 & 7 **7** – **1** POS 11 POS 12 POS 13 **00000C**

POSITION 6 & 7 – TRIM DESIGNATION NUMBERS	
Desig.	CODE
S1L*	L1
SET	ST
* Trim utilized on steam service only.	

POSITION 11 – RANGE SPRINGS		
SST Range Spring		CODE
psig	(Barg)	
5-30	(.34-2.1)	A
20-80	(1.4-5.5)	B
70-140	(4.8-9.7)	C
130-200	(9.0-13.8)	D

POSITION 12 - OPTIONS		
Description	Option	CODE
Wetted Parts Cert 'U' (USP).	Std	6
For Special Construction Contact Cashco for Special Product Code.	SPQ	X

POSITION 13 - OPTIONS		
Description	Option	CODE
#32Ra Micro-inch Internal finish.	Std	0
#20Ra Micro-inch Internal Finish.		P

*** For information on ATEX see
pages 8 & 9 on the IOM.**

Cashco, Inc.
P.O. Box 6
Ellsworth, KS 67439-0006
PH (785) 472-4461
Fax. # (785) 472-3539
www.cashco.com
email: sales@cashco.com
Printed in U.S.A. 5381-TB

Cashco GmbH
Handwerkerstrasse 15
15366 Hoppegarten, Germany
PH +49 3342 30968 0
Fax. No. +49 3342 30968 29
www.cashco.com
email: germany@cashco.com

Cashco do Brasil, Ltda.
Al.Venus, 340
Indaiatuba - Sao Paulo, Brazil
PH +55 11 99677 7177
Fax. No.
www.cashco.com
email: brazil@cashco.com