


MODEL D-57

SPECIAL CONSTRUCTION FOR CHLORINE (Cl₂) SERVICE

The following is a description of a proven construction for chlorine gas or liquid service. Units are available in sizes 1/2"-1" (DN15-25).

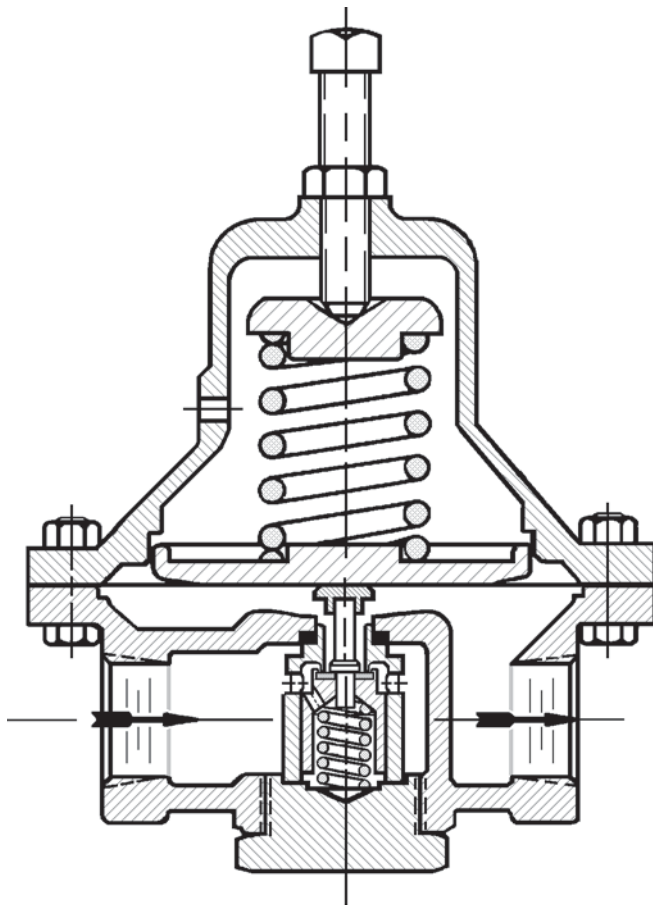

Model D-57 Cutaway

STANDARD CONSTRUCTION

Body.....	Carbon Steel *
Spring Chamber.....	Carbon Steel *
Bolting.....	Plated Steel
Spring Button.....	SST or Cast Iron
Range Spring.....	Epoxy-coated Steel
Pressure Plate.....	Cast Iron
Adjusting Screw.....	Steel Plated
Jam Nut.....	Steel Plated

* ASTM A216 Gr. WCB

SPECIAL CONSTRUCTION

Trim Designation No. "M3"

Plug.....	Monel with Fluorocarbon Elastomer Seat
Cylinder.....	Monel
Cylinder Gasket.....	Gylon 3529 (PTFE)
Diaphragm.....	Gylon 3522 (PTFE)
Pusher Plate.....	Monel
Body Cap.....	Monel
Spring.....	Inconel X-750


PRESSURE - TEMPERATURE RATING

Inlet: 300 psig (20.7 barg) -20 to +200°F (-29 to +93°C)
Outlet: 100 psig (6.9 barg) -20 to +200°F (-29 to +93°C)

Opt-57

Special Cleaning for Cl₂ Service per Cashco
Spec. No. S-1589.
Epoxy painted.

MODEL D-57 PRODUCT CODE 03/08/16

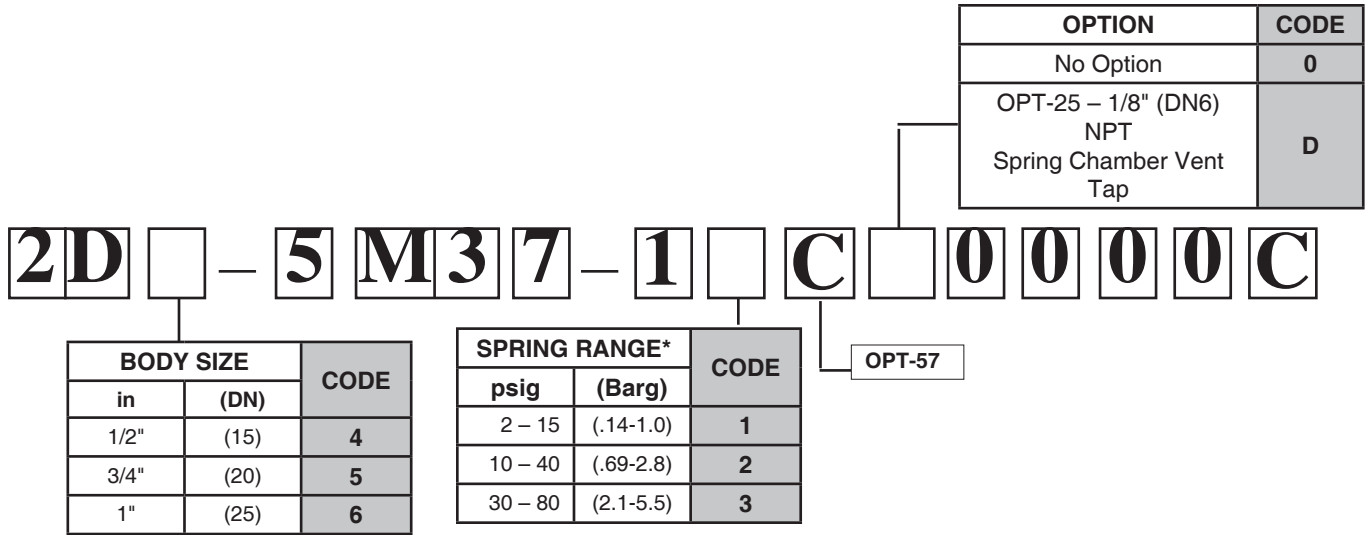

* Consult Factory for 70-150 psig spring range.

Cashco, Inc.
P.O. Box 6
Ellsworth, KS 67439-0006
PH (785) 472-4461
Fax. # (785) 472-3539
www.cashco.com
email: sales@cashco.com
Printed in U.S.A. D-57-TB

Cashco GmbH
Handwerkerstrasse 15
15366 Hoppegarten, Germany
PH +49 3342 30968 0
Fax. No. +49 3342 30968 29
www.cashco.com
email: germany@cashco.com

Cashco do Brasil, Ltda.
Al.Venus, 340
Indaiatuba - Sao Paulo, Brazil
PH +55 11 99677 7177
Fax. No.
www.cashco.com
email: brazil@cashco.com